
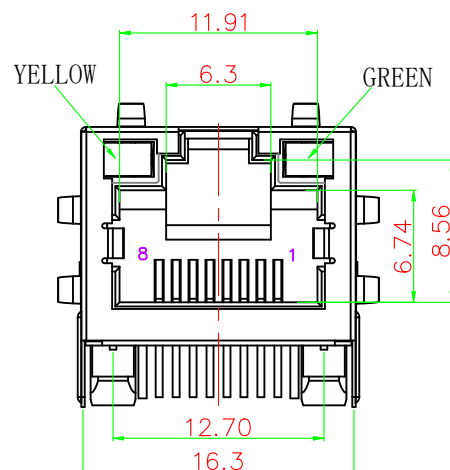
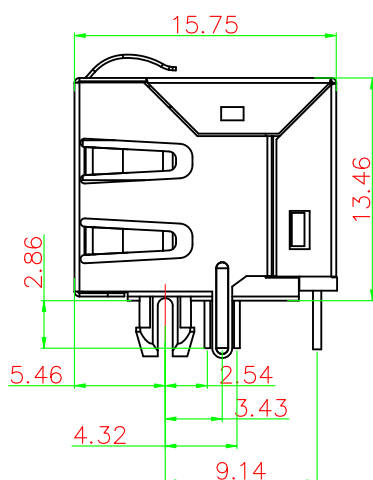




H90030012E

- Environmental:
 - 1.Storage: -10°C to +40°C Relative humidity<80%
 - 2.Operation: -40°C to 85°C
- Electrical:
 - 1.Voltage rating:125VAC RMS
 - 2.Current rating:1.5AMP
 - 3.Contact Resistance: 35mΩ Max
 - 4.Insulation resistance:100MΩ @ 500 VDC
 - 5.Dielectric strength:1000V AC or 1500V DC RMS
@0.5mA 50Hz or 60Hz minute

Mechanical Dimensions:

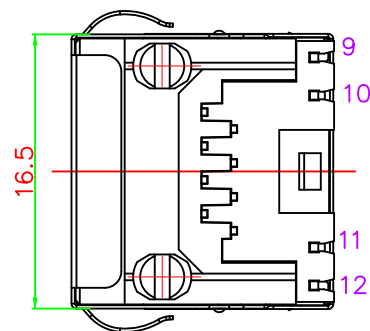

LED Specification

Standaud LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.8~2.8v
Yellow	585nm	20mA	1.8~2.8v

Dimensions in mm

Unless otherwise specified, Tolerance: .xx ±0.25

REV.: A3

1 of 3

DRAWED:

CHECKED:


APPROVED:

Tel: (0760)86103511 86103508 Fax: (0760)86103686 Post code: 528416

E-Mail: sales@hanrun.com http://www.hanrun.com

H90030012E


PCB Layout:

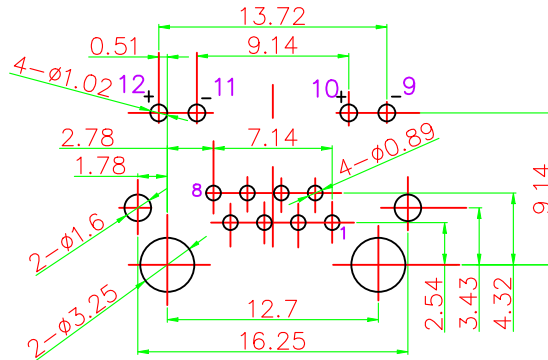

Recommended PCB layout (Component Side View)

All dimension tolerance are ± 0.08 unless otherwise specified

Suggested Panel Cutout:

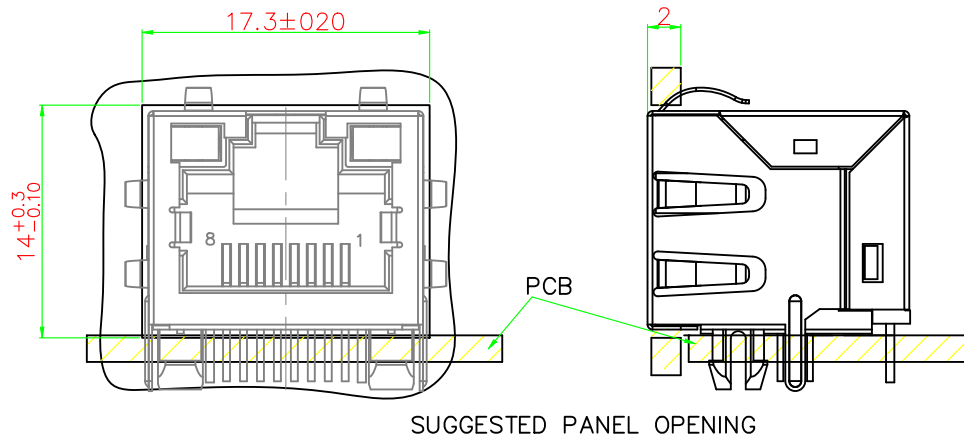

Mechanical:

1. Housing & insert material: PBT UL94V-0 color black
2. Contact material: phosphor bronze T=0.35mm
3. Plating: gold plated 6"u(MIN) in contact area and nickel bottom 50U", tin on solder area 100U"Min
4. Mating/unmating force: 22N/2.27Kg Max
5. Retention strength: 57.83N Min
6. Operating life: 750 Cycles Min
7. RoHS compliant (PB Free)

Dimensions in mm

Unless otherwise specified, Tolerance: .xx ± 0.25

REV.: A3

2 of 3

DRAWED:

CHECKED:


APPROVED:

Tel: (0760)86103511 86103508 Fax: (0760)86103686 Post code: 528416


E-Mail: sales@hanrun.com http://www.hanrun.com

H90030012E

PACKAGING(Tube)

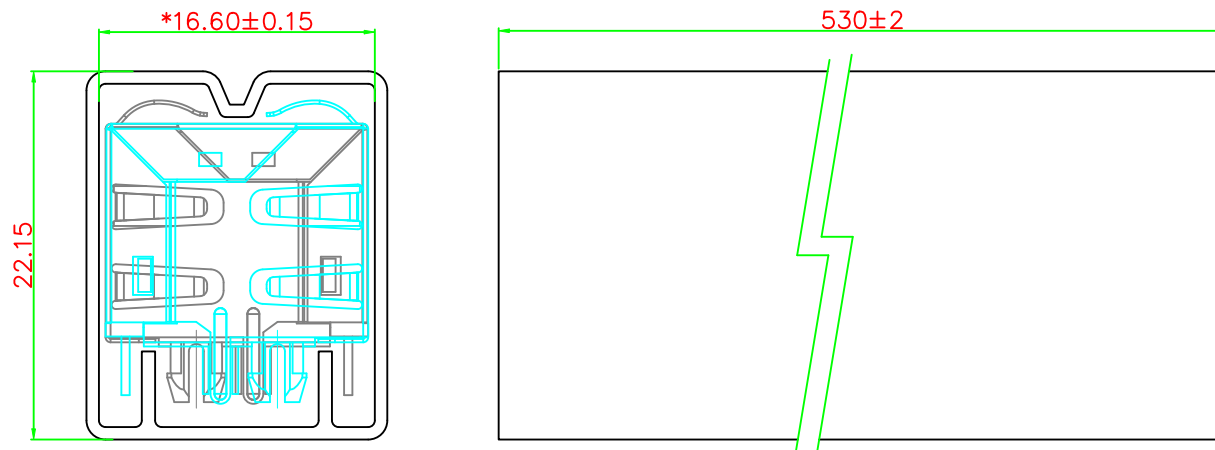

Carton

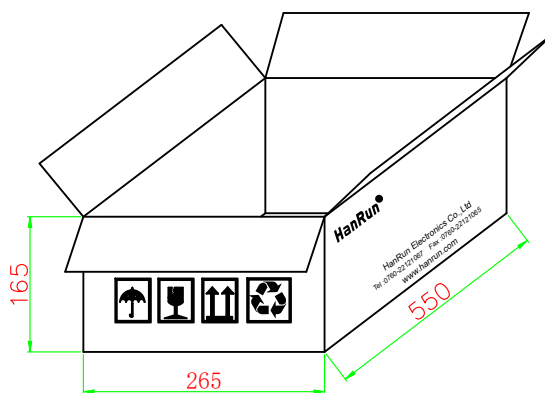

PACKING QUANTITY:

28 pcs Finished Goods / Tube

84 Tube (2352pcs Finished Goods) / Carton

WEIGHT: 4.2 g/pcs

N.W.: 9.88 KG/Carton

G.W.: 10.42 KG/Carton

Dimensions in mm

Unless otherwise specified, Tolerance: .xx ±0.25

REV.: A3

3 of 3

DRAWN:

CHECKED:

APPROVED:

Tel: (0760)86103511 86103508 Fax: (0760)86103686 Post code: 528416

E-Mail: sales@hanrun.com http://www.hanrun.com